


Portweiterleitung mit einem *UPC Router*

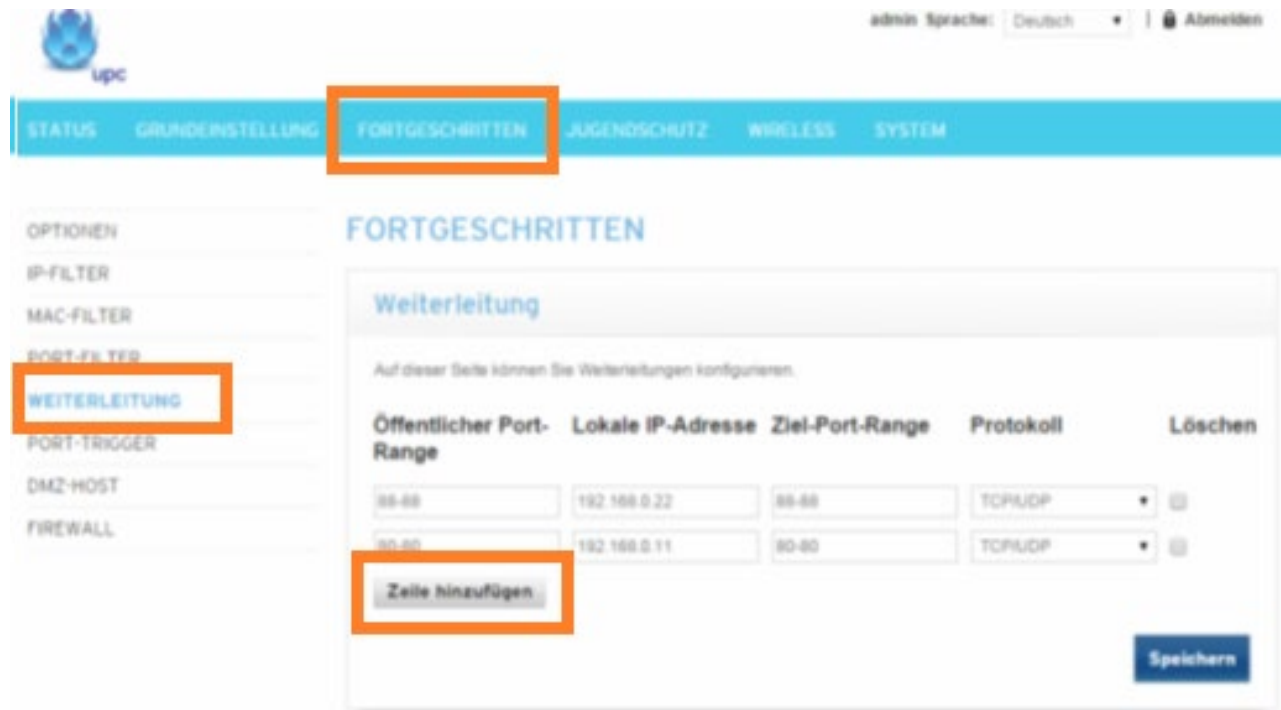

The screenshot shows the web interface of a UPC Router. At the top, there is a navigation bar with the following tabs: STATUS, GRUNDEINSTELLUNG, FORTGESCHRITTEN, JUGENDSCHUTZ, WIRELESS, and SYSTEM. The 'FORTGESCHRITTEN' tab is highlighted with an orange box. Below the navigation bar, on the left side, there is a sidebar menu with the following options: OPTIONEN, IP-FILTER, MAC-FILTER, PORT-FILTER, WEITERLEITUNG, PORT-TRIGGER, DMZ-HOST, and FIREWALL. The 'WEITERLEITUNG' option is highlighted with an orange box. The main content area is titled 'FORTGESCHRITTEN' and 'Weiterleitung'. It contains a table for configuring port forwarding rules. The table has five columns: Öffentlicher Port-Range, Lokale IP-Adresse, Ziel-Port-Range, Protokoll, and Löschen. There are two rows of data in the table. The first row shows '88-88' for the public port range, '192.168.0.22' for the local IP address, '88-88' for the target port range, and 'TCP/UDP' for the protocol. The second row shows '80-80' for the public port range, '192.168.0.11' for the local IP address, '80-80' for the target port range, and 'TCP/UDP' for the protocol. Below the table, there is a button labeled 'Zeile hinzufügen' (Add row) which is highlighted with an orange box. At the bottom right of the main content area, there is a button labeled 'Speichern' (Save).

Öffentlicher Port-Range	Lokale IP-Adresse	Ziel-Port-Range	Protokoll	Löschen
88-88	192.168.0.22	88-88	TCP/UDP	
80-80	192.168.0.11	80-80	TCP/UDP	

Zeile hinzufügen

Speichern

1. Öffnen Sie den Browser und rufen Sie Ihren Router auf.
2. Klicken Sie unter *Fortgeschritten* auf *Weiterleitung*.
3. Klicken Sie auf *Zeile hinzufügen*.

upc

admin Sprache: Deutsch | Abmelden

STATUS GRUNDEINSTELLUNG FORTGESCHRITTEN JUGENDSCHUTZ WIRELESS SYSTEM

OPTIONEN
IP-FILTER
MAC-FILTER
PORT-FILTER
WEITERLEITUNG
PORT-TRIGGER
DMZ-HOST
FIREWALL

FORTGESCHRITTEN

Weiterleitung

Auf dieser Seite können Sie Weiterleitungen konfigurieren.

Öffentlicher Port-Range	Lokale IP-Adresse	Ziel-Port-Range	Protokoll	Löschen
88-88	192.168.0.22	88-88	TCP/UDP	☐
80-80	192.168.0.11	80-80	TCP/UDP	☐

4. *Öffentliche Port-Range*: Wählen Sie hier den öffentlichen Portbereich den Sie freigeben wollen (frei wählbar, wir empfehlen einen 5-stelligen z.B. 53080).
5. *Lokale IP-Adresse*: Tragen Sie hier das Gerät (die IP) ein, dass Sie aus dem Internet erreichbar machen wollen.
6. *Ziel-Port-Range*: Wählen Sie hier den lokalen Portbereich Ihres Gerätes aus (SSL Port: 443).
7. *Protokoll*: Wählen Sie hier TCP als Protokoll aus.
8. Klicken Sie auf *Speichern* um die Änderungen zu übernehmen.